

UR5078 Polyurethane Resin

UR5078 is an ultra-high performance resin system based on urethane technology but using a polybutadiene polyol. It is for use in harsh marine environments, particularly where delicate components are present.

- Excellent resistance to sea water; ideal for marine environments
- High degree of flexibility; ideal for use where the protection of delicate components is a concern
- Good low temperature performance; suitable for use down to -60°C
- Excellent oxidation resistance; high performance in a range of challenging environments

Approvals	RoHS Compliant (2015/863/EU):	Yes
	UL Approval:	No

Typical Properties


Liquid Properties:	Base Material	Polyurethane
	Density Part A - Resin (g/ml)	0.99
	Density Part B - Hardener (g/ml)	1.62
	Part A Viscosity (mPa s @ 23°C)	5000
	Part B Viscosity (mPa s @ 23°C)	55
	Mixed System Viscosity (mPa s @ 23°C)	2500
	Mix Ratio (Weight)	2.55:1
	Mix Ratio (Volume)	4.16:1
	Usable Life (20°C)	15 mins
	Gel Time (23°C)	30 mins
	Cure Time (23°C)	36 hours
	Colour Part A - Resin	Black
	Colour Part B - Hardener	Milky orange
	Storage Conditions	Dry Conditions: Above 20°C, Below 30°C
	Shelf Life	6 Months
	Exotherm	< 50°C
	(Measured on 100ml sample in a cylinder of diameter 49.4mm @ 20-25°C)	
	Shrinkage	< 0.5%

Cured System:	Thermal Conductivity (W/m.K)	0.20
	Cured Density (g/ml)	1.11
	Temperature Range (°C)	-60 to +120
	Max Temperature Range (Short Term (°C)/30 mins) (Application and Geometry Dependent)	+130
	Dielectric Strength (kV/mm)	20
	Volume Resistivity (ohm-cm)	10 ¹⁶
	Shore Hardness	A70
	Colour (Mixed System)	Black
	Flame Retardancy	No
	Loss Tangent @ 50 Hz	0.015
	Permittivity @ 50 Hz	3.10
	Elongation At Break	300%
	Tensile Strength	7 MPa
	Tear Strength	20 MPa

Mixing Procedures

Resin Packs

When in Resin pack form, the resin and hardener are mixed by removing the clip and moving the contents around inside the pack until thoroughly mixed. To remove the clip, remove both end caps, grip each end of the pack and pull apart gently. By using the removed clip, take special care to push unmixed material from the corners of the pack. Mixing normally takes from three to four minutes depending on the skill of the operator and the size of the pack. Both the resin and hardener are evacuated prior to packing so the system is ready for use immediately after mixing. The corner may be cut from the pack so that it may be used as a simple dispenser. There is also a YouTube video ([Polyurethane Mixing Instructions](#)) available on the Electrolube channel to show the mixing process.

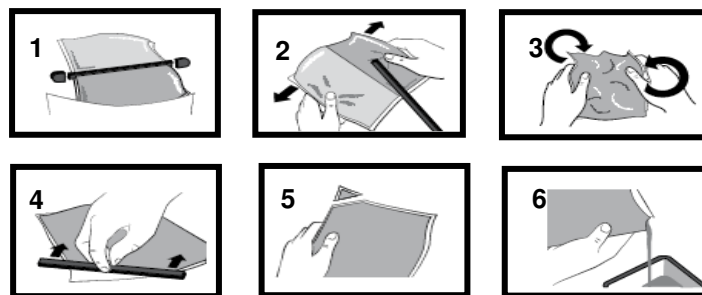

Bulk Mixing

When mixing, care must be taken to avoid the introduction of excessive amounts of air. Automatic mixing equipment is available which will not only mix both the resin and hardener accurately in the correct ratio but do this without introducing air. Containers of Part A (Resin) and Part B (Hardener) should be kept sealed at all times when not in use to prevent the ingress of moisture. Bulk material must be thoroughly mixed before use. Incomplete mixing or use of the wrong mix ratio will result in erratic or partial curing.

Additional Information

- Cleaning:** It is far easier for machines & containers to be cleaned before the resin has been allowed to cure. Electrolube's RRS is suitable for cleaning machines and containers and cured resin may be slowly softened and removed by soaking in our RRS.
- Curing:** Do not heat cure large volumes immediately. Allow these to gel at room temperature and post-cure at high temperature if required (refer to liquid properties for details). Small volumes (250ml) may be heat cured immediately.
- Storage:** When storing under very cold conditions, the hardener may crystallise. If this occurs, simply warm (40°C) the container gently until all crystals have re-melted.
- Health & Safety:** Always refer to the Health & Safety data sheet before use. These can be downloaded from www.electrolube.com

Revision 3: Mar 2019

Copyright Electrolube 2013

All information is given in good faith but without warranty. Properties are given as a guide only and should not be taken as a specification.

Electrolube cannot be held responsible for the performance of its products within any application determined by the customer, who must satisfy themselves as to the suitability of the product.

Ashby Park, Coalfield Way,
Ashby de la Zouch,
Leicestershire LE65 1JR

T +44 (0)1530 419 600

F +44 (0)1530 416 640

BS EN ISO 9001:2008
Certificate No. FM 32082